



## 336L Cabinets

### Cabinets for Traffic Management

The Safetran 336L Series of traffic control cabinets are built to the exacting standards and specifications of NYDOT, Caltrans, FHWA, and TEES. Each 336L cabinet features a 19-inch EIA rack that provides ultimate ease and flexibility of traffic control component configuration.

The modular design of Econolite's Safetran 336L cabinet provides control of up to eight vehicle and four pedestrian phases. The 336L Series of cabinets also meet the stringent weatherproof requirements for State of California TEES enclosures and can be delivered UL-approved.

Econolite's Safetran 336L Series of traffic cabinet securely houses the signal controller and other vital intersection electronic equipment that manages efficient intersection operations and traffic flow. The strict adherence to industry standards and specifications ensures the highest levels of safety for all roadway users.

*Equipment shown in cabinet is for demonstration purposes only. See details on back for what is included.*

#### Key Features

- Meet all Caltrans requirements
- Two doors (front and rear)
- Mounted one base, side of pole, or top of post
- Three-point locking system
- Suited for intersection and controllers and accessories

## 336L Cabinets: Description

This versatile, modular design provides control of up to eight vehicle and four pedestrian phases. An optional configuration provides six additional load switch position for use as overlaps, seven-wire interconnect outputs, and a variety of special function outputs. Ample space is provided for mounting two 170 type or 2070 type controllers for master/local application. This design includes the newest 206L Switched mode power supply replacing the older Ferro-resonant technology. The power supply provides full output regulation across changes in the AC line voltage and output load over the full operating temperature range of -34C to +74C Power Factor correction is also provided.


The cabinet includes a transient voltage surge suppression unit at the main power entrance to the cabinet. This unit provides "clean" AC power to sensitive devices in the cabinet. A 30A main power disconnect circuit breaker is also included. A terminal facility for convenience and simplification in when adding a Battery Backup System (BBS) or generator connection in this cabinet has been included.

A din-rail mounted thermostat is mounted in the top of the cabinet with an angled bracket for easier access. This new thermostat assembly has better accuracy and temperature control and is shrouded for protection against shock.


A new PDA "L" version is incorporated to include a 15A Clean AC circuit breaker, a Solid State relay in replacement for the mercury filled contactor, with a "Health" relay and fault indicator. The Signal and Flasher circuit breakers have been changed to reflect the low power savings to 10A. Each assembly will also include a pull-out computer drawer.

The assembly incorporates the removable 19" EIA rack for ease of maintenance. The cabinet shell is constructed of heavy 0.125 Inch aluminum to provide a durable, NEMA 3R-specified, weatherproof enclosure.


Specifications	336L Cabinets
Dimensions	46 in H X 24 in W X 20 in D
Finish	Anodized, bare, painted, or anti-graffiti
Material	Aluminum 0.125 in.
Ship Weight	238 lbs.

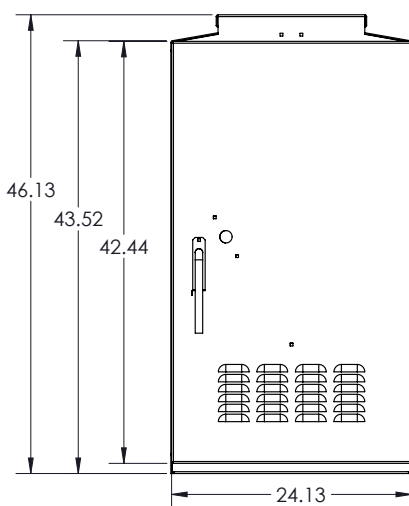

Front View



Top View

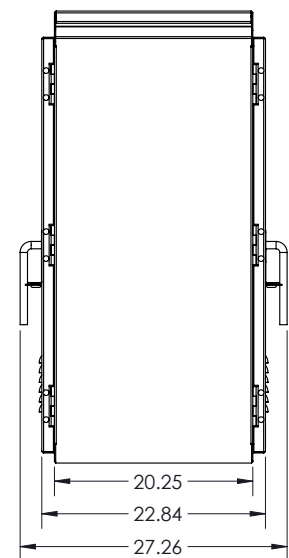

Side View