

Certified by ISO9001 International Quality Control System

### Canada Pedestrian Lamps

#### Features

- Low power consumption & long operating lifetime LEDs
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Fully compatible with NEMA controllers/conflict monitors
- Even brightness & standard chromatogram

#### Dimensions

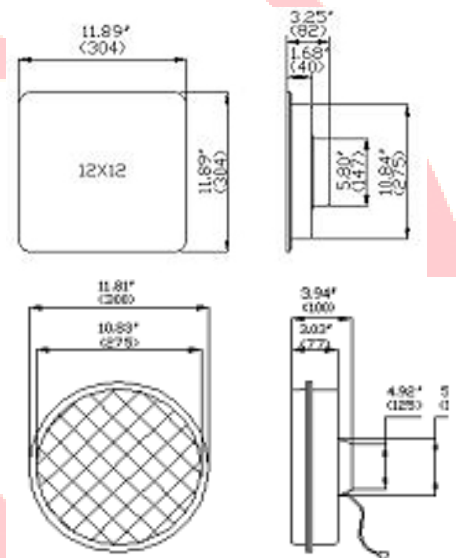


Fig. A



Fig. B



Fig. C



Fig. D

Model Number	Size (inch)	Fig.	Symbol			Voltage (Typical)	Voltage Range	Power (w)	Operation Temp.
			Hand	Man	Countdown				
JXM200-VIHMCADR	12"	A	Outline	Outline	-	120V-60Hz	80v-135v	7/7	-40°F-+165°F
JXM200-VIHMCAD	12"x12"	B	Outline	Outline	-	120V-60Hz	80v-135v	7/7	-40°F-+165°F
JXM200-VIE	12"x12"	C			2 Digits	120V-60Hz	80v-135v	4	-40°F-+165°F
JXM200-VIER	12"	D			2 Digits	120V-60Hz	80v-135v	4	-40°F-+165°F

All characteristics, including chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are conformed to standards specified in ITE LED Vehicle Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact: