


Certified by ISO9001 International Quality Control System

## JXC300-HF Series Hi-Flux LED Vehicular Lamps

### Features & Specifications

- Compliance with latest ITE specifications
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Compliant to FCC Title 47
- Fully compatible with NEMA controllers/conflict monitors
- Uniform incandescent appearance with Hi-flux technology

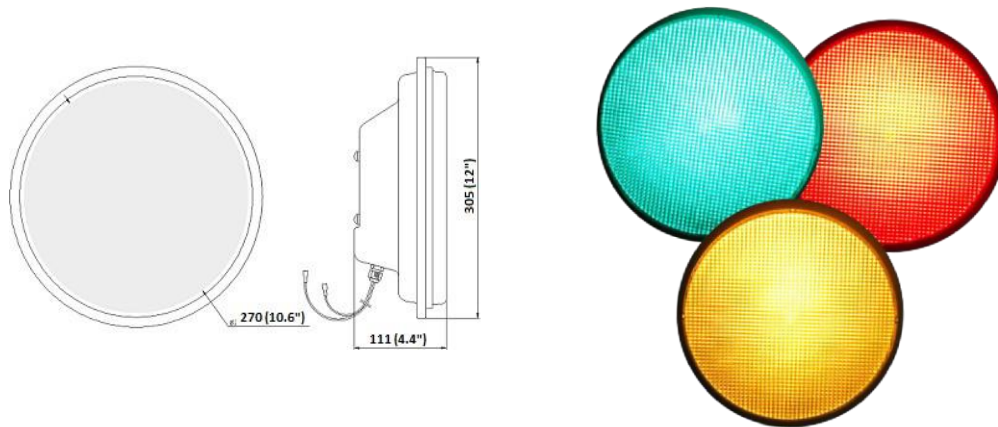

Model Number	Size (mm)	Color (nm)	Lens Color	Voltage Range	Power (W)	Operation Temp.	Power Factor	T.H.D	ITE Specs
<b>JXC300-HFTR03</b>	300	Red (626)	Tinted	80v-135v	6.2	-40°F ± 165°F	> 0.9	< 20%	Yes
<b>JXC300-HFTR04</b>	300	Red (626)	Tinted	80v-135v	6.2	-40°F ± 165°F	> 0.9	< 20%	Yes
<b>JXC300-HFTY03</b>	300	Yellow (592)	Tinted	80v-135v	12	-40°F ± 165°F	> 0.9	< 20%	Yes
<b>JXC300-HFTY04</b>	300	Yellow (592)	Tinted	80v-135v	12	-40°F ± 165°F	> 0.9	< 20%	Yes
<b>JXC300-HFTG03</b>	300	Green (505)	Tinted	80v-135v	8	-40°F ± 165°F	> 0.9	< 20%	Yes
<b>JXC300-HFTG04</b>	300	Green (505)	Tinted	80v-135v	8	-40°F ± 165°F	> 0.9	< 20%	Yes

All characteristics, including visual characters, chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are conformed to standards specified in ITE LED Vehicle Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact us at (972) 480-0888 or visit our website at [www.trastarusa.com](http://www.trastarusa.com).