


Certified by ISO9001 International Quality Control System

JXJ300-07T03 Omni-directional LED Arrow Lamps (Tinted)

Features & Specifications

- Conform to latest ITE specifications
- Low power consumption & long operating lifetime LEDs
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Compliant to FCC Title 47
- Fully compatible with NEMA controllers/conflict monitors
- Omni directional & incandescent look

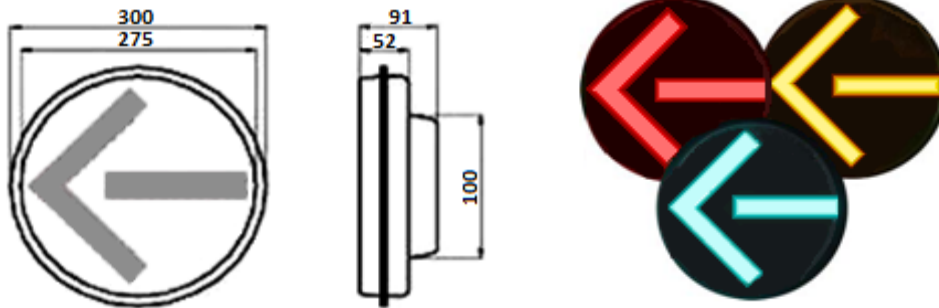

Model Number	JXJ300-07TR03	JXJ300-07TY03	JXJ300-07TG03
Size (mm)	300	300	300
Color (nm)	Red (626)	Yellow (592)	Green (505)
Voltage (Typical)	120V - 60hz	120V - 60hz	120V - 60hz
Voltage Range	80V - 135V	80V - 135V	80V - 135V
Power (w) Typical	7	9	6
Operation Temperature	-40°F to +165°F	-40°F to +165°F	-40°F to +165°F
Power Factor	> 0.9	> 0.9	> 0.9
T.H.D.	< 20%	< 20%	< 20%
ITE Specifications	Yes	Yes	Yes

Note: Products with 220 V are also available upon request.

All characteristics, including visual characters, chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are conformed to standards specified in ITE LED Vehicle Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact us at (972) 480-0888 or visit our website at www.trastarusa.com.